

EURO VISTA MULTI SLIDE™ IMPACT RATED ALUMINUM SLIDING DOORS




The Euro Vista Multi Slide™ is unlike any other impact rated multi slide door. The panel interlock, at less than 1", is the slimmest sight line profile available providing the largest views and the maximum panel to glass ratios. The panels can span up to 98 sq ft with heights up to 14' and widths up to 7' all while maintaining an impact rating for inclement weather areas. These massive panels glide open and closed effortlessly thanks to the patented EZ Glide™ roller system. The sill can be embedded flush with the finish floor and can meet water ratings without the need of a sill riser. The Euro Vista Multi Slide™ is a truly unique sliding door system and provides consumer benefits that cannot be found anywhere else.

PANEL MINIMUM / MAXIMUM



Max Panel Weight:	800 lbs	Min Panel Height:	24"
Min Panel Width:	24"	Max Panel Height:	168"
Max Panel Width:	84"	Max # of Panels:	8

OVERVIEW DIAGRAM


Interior View







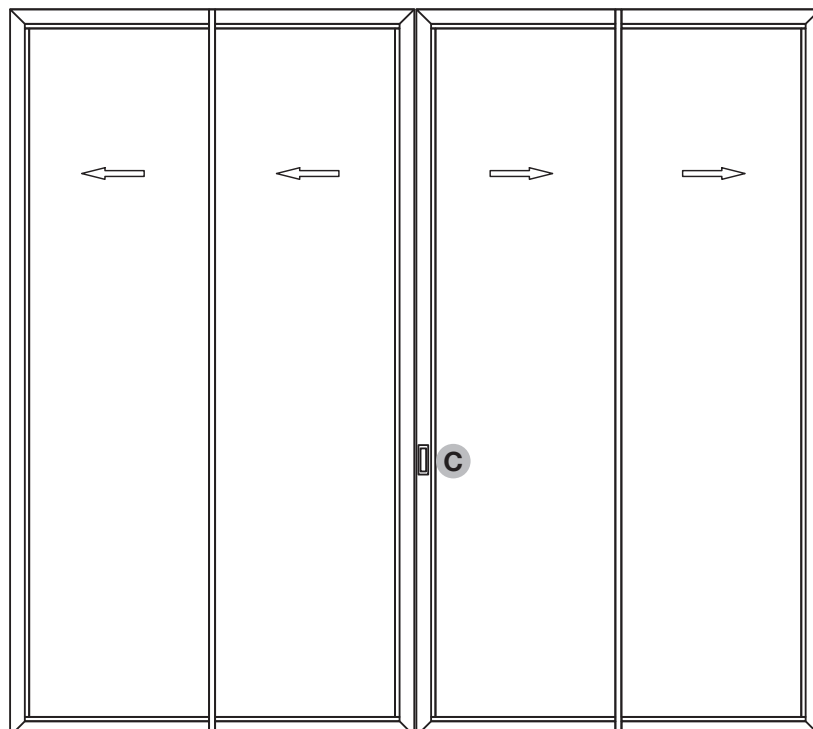
Exterior View




HANDLES





Ladder Pull Handle

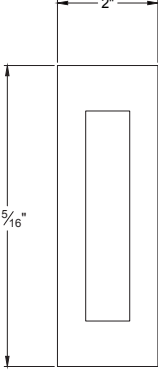		
White	Polished Stainless Steel	Brushed Satin
		
Bronze	Black	



Recessed Pull





	
Brushed Satin	Black

Standard 12"
Custom up to 72" nominal


LOCKS

Twinpoint Lever



			
White	Brushed Satin	Bronze	Black

Thumb Turn



62mm Double Sided
Key / Thumb Turn
Use: Standard Option
Finish: Raw

CONFIGURATIONS

OXX



O = FIXED PANEL
X = ACTIVE PANEL

OOXX



OXX-XXO



XXXXX



OX-XXXX




OXX-XXXXO




XXX-XXX




EXTRUSION PROFILES




2 Track

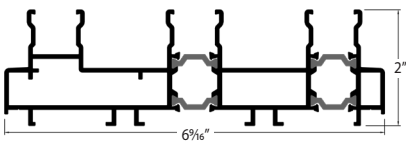

3 Track

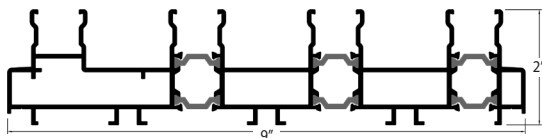

4 Track

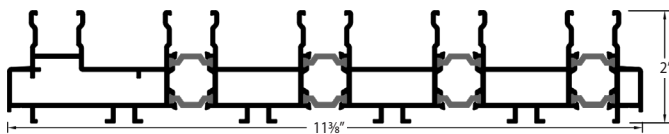

5 Track



Snap Track




Jamb / Header Track



Condensation Drain



End Cap




Astragal




Reducer Bar




P Hook




Interlock



Center Meet Astragal



Corner Astragal





Sash & Glazing Bead


POCKETS

Measuring for Pocket Applications


When measuring for a pocket application you need to accommodate 2 1/4" in your pocket for the multi slide interlock to pass freely into the pocket. Additionally, you need to leave a 5/8" space on the opposite track side for clearance inside the pocket.

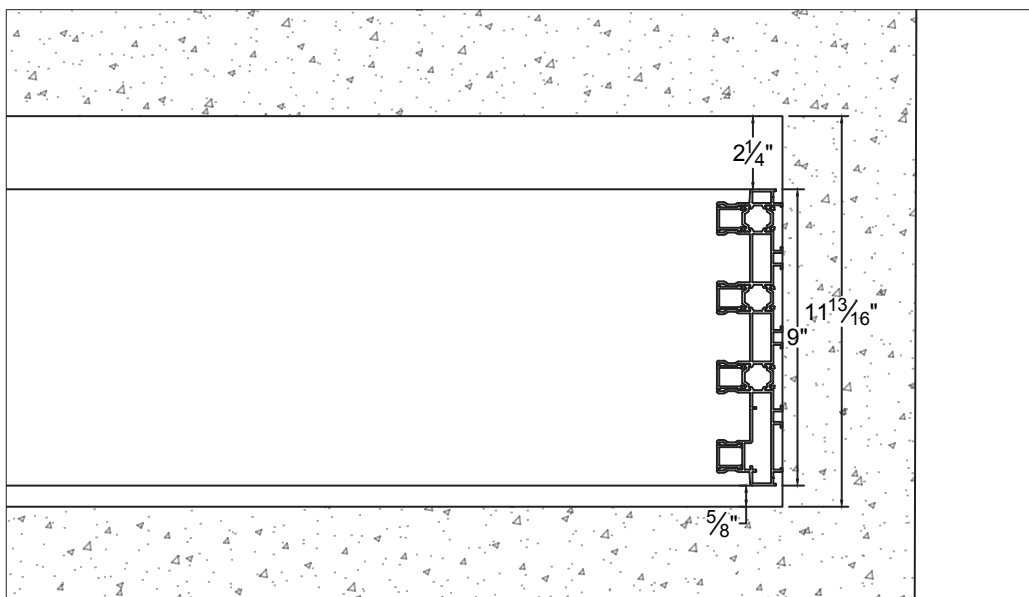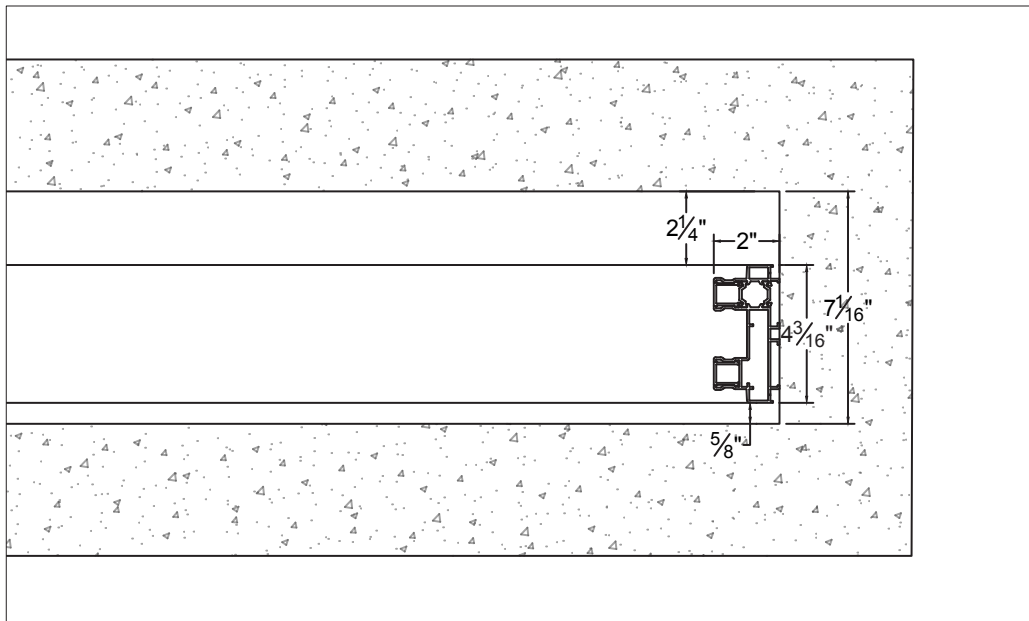


Pocket Installation Method 1




P Hook - Profile View



Fully Close and Secure Panels

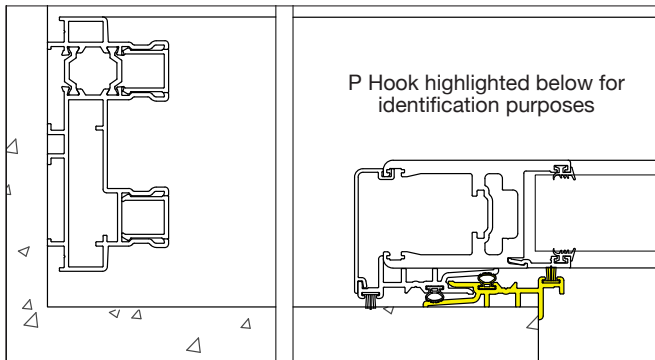


Dry Fit Interlock and Mark Position

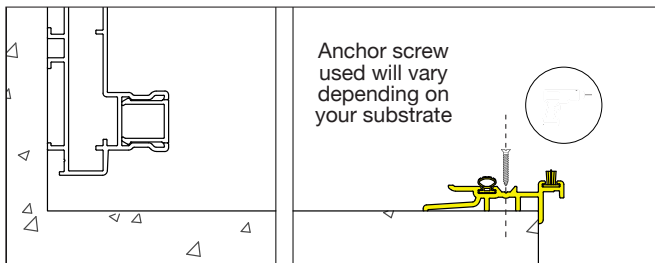


Anchor / Secure P Hook


Pocket Installation Method 2




Steel L Bracket



Fully Close and Secure Panels

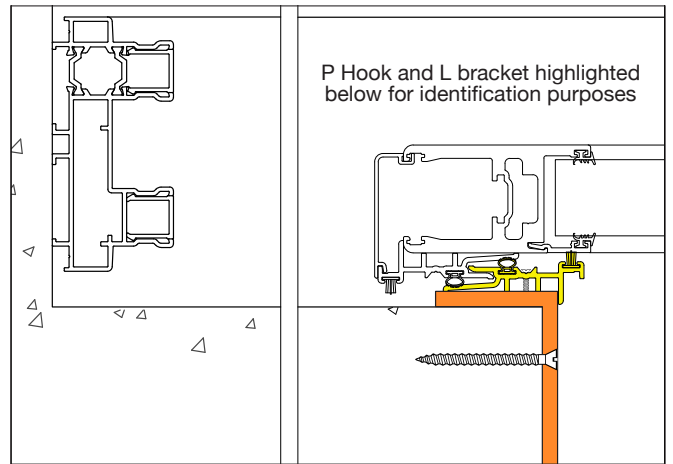

Dry Fit Interlock

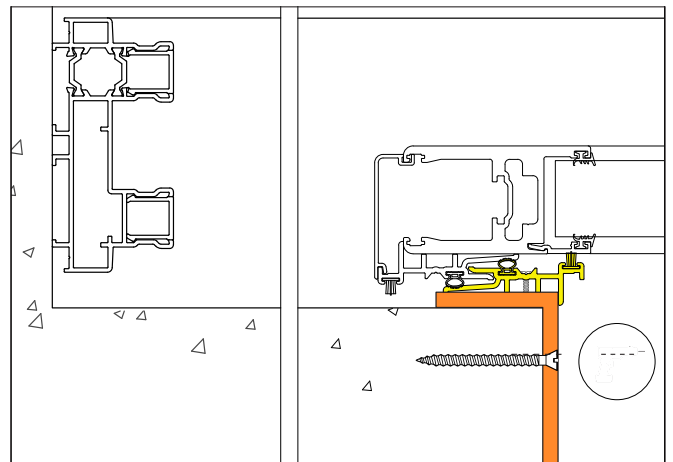

Anchor / Secure P Hook - L Bracket

FINISH OPTIONS

Standard Finishes



White Clear Anodized Bronze Black

Standard Wood Finishes



Mahogany / Sapele White Oak

Exotic Wood Finishes




African Rosewood Ash Birch Curly Maple Red Oak Walnut Zebrawood

Faux Wood Grain Finishes




Aspen Burlwood Chesnut Cherry Cinnamon Red Dark Walnut English Oak Hazelnut Brown Honey Pine Mahogany Red Natura




Teak Walnut Brown Weathered Teak

COMMON GRID & MUNTIN OPTIONS


These muntin configurations are just a few examples of the numerous possibilities. All configurations are available in aluminum or wood.

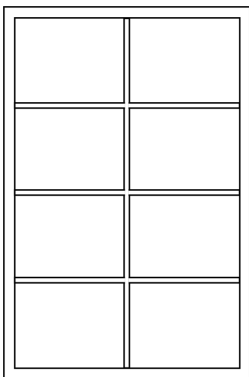


Traditional Grid

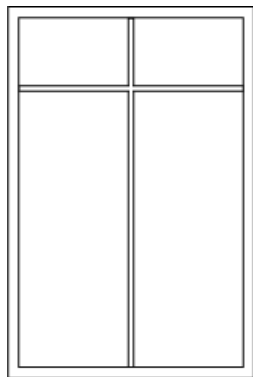


Cross Grid

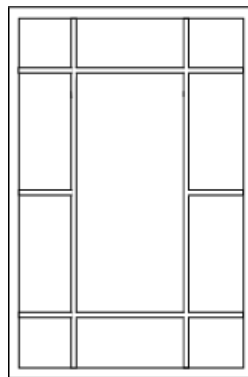

English Grid

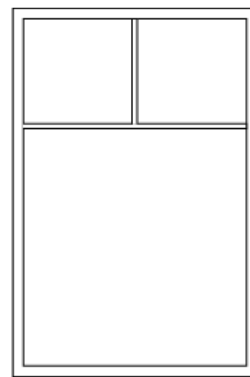


Ladder

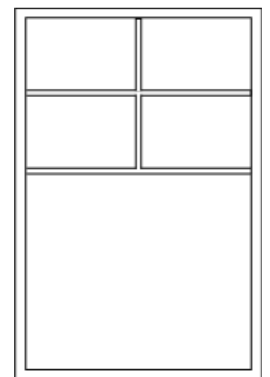

Double Ladder


3/4" Flat Muntin



GLAZING DETAILS


1 1/4" Insulated Impact Glass

Sash & Glazing Bead

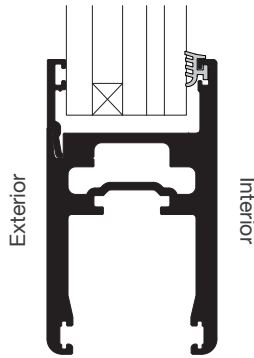


9/16" Monolithic Impact Glass


Sash & Glazing Bead

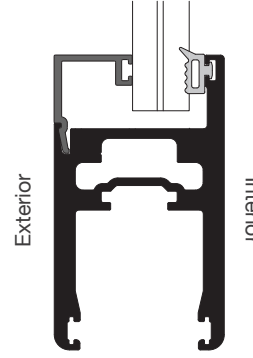


Interlock

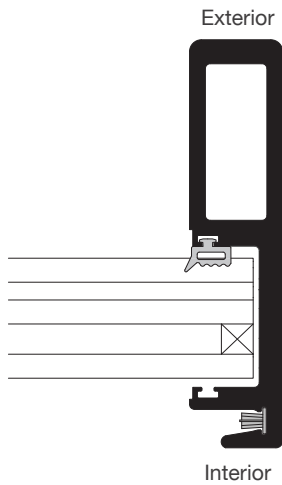


Interlock

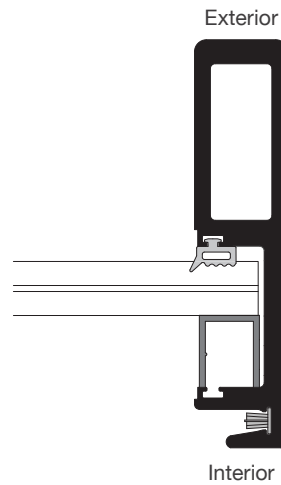

MS Corner Astragal (Outside)


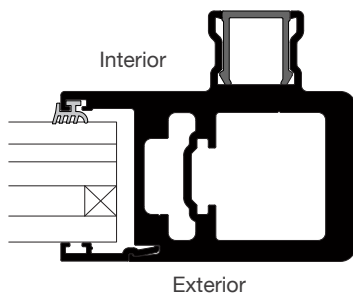


MS Corner Astragal (Outside)

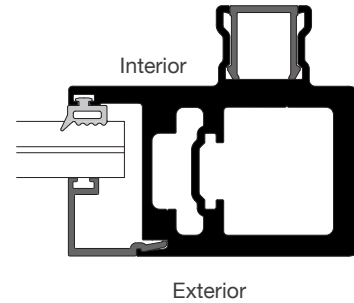


EMBED OPTIONS

**Embed Options
No Water Management**

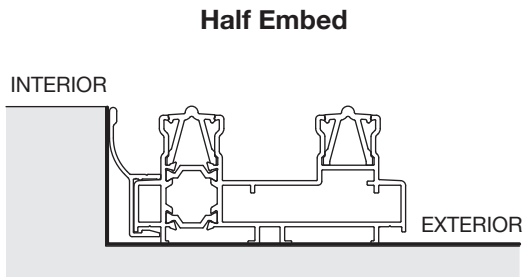
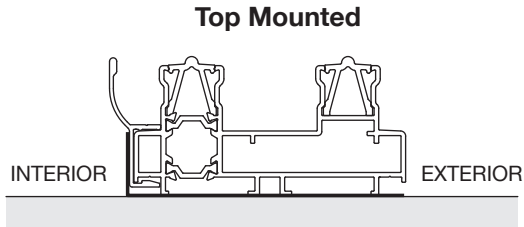


NOTE: For ANY embed situation, you must leave 1/8" clearance between the finished floor and the leading / trailing edge of the sill. Failure to do so will impede the movement of the panel.

**Full Embed
No Water Management / Interior Only**

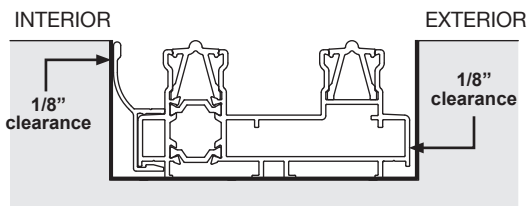


**Embed Options
With Water Management**

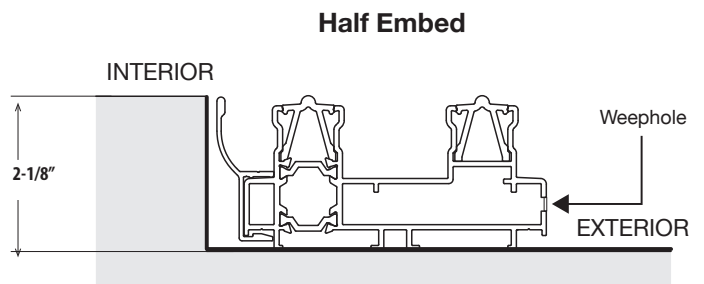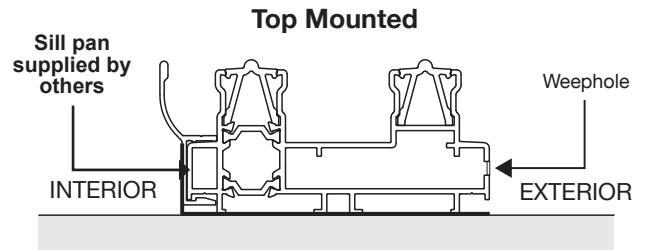


NOTE: Exterior slope must be 1" drop in elevation for every linear foot

Full Embed

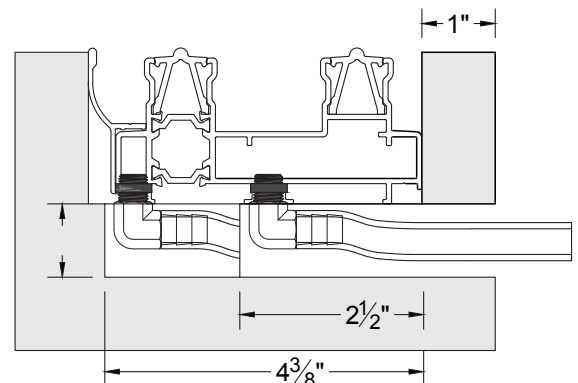


WATER MANAGEMENT


Full Embed MS/L&S
Water Management System

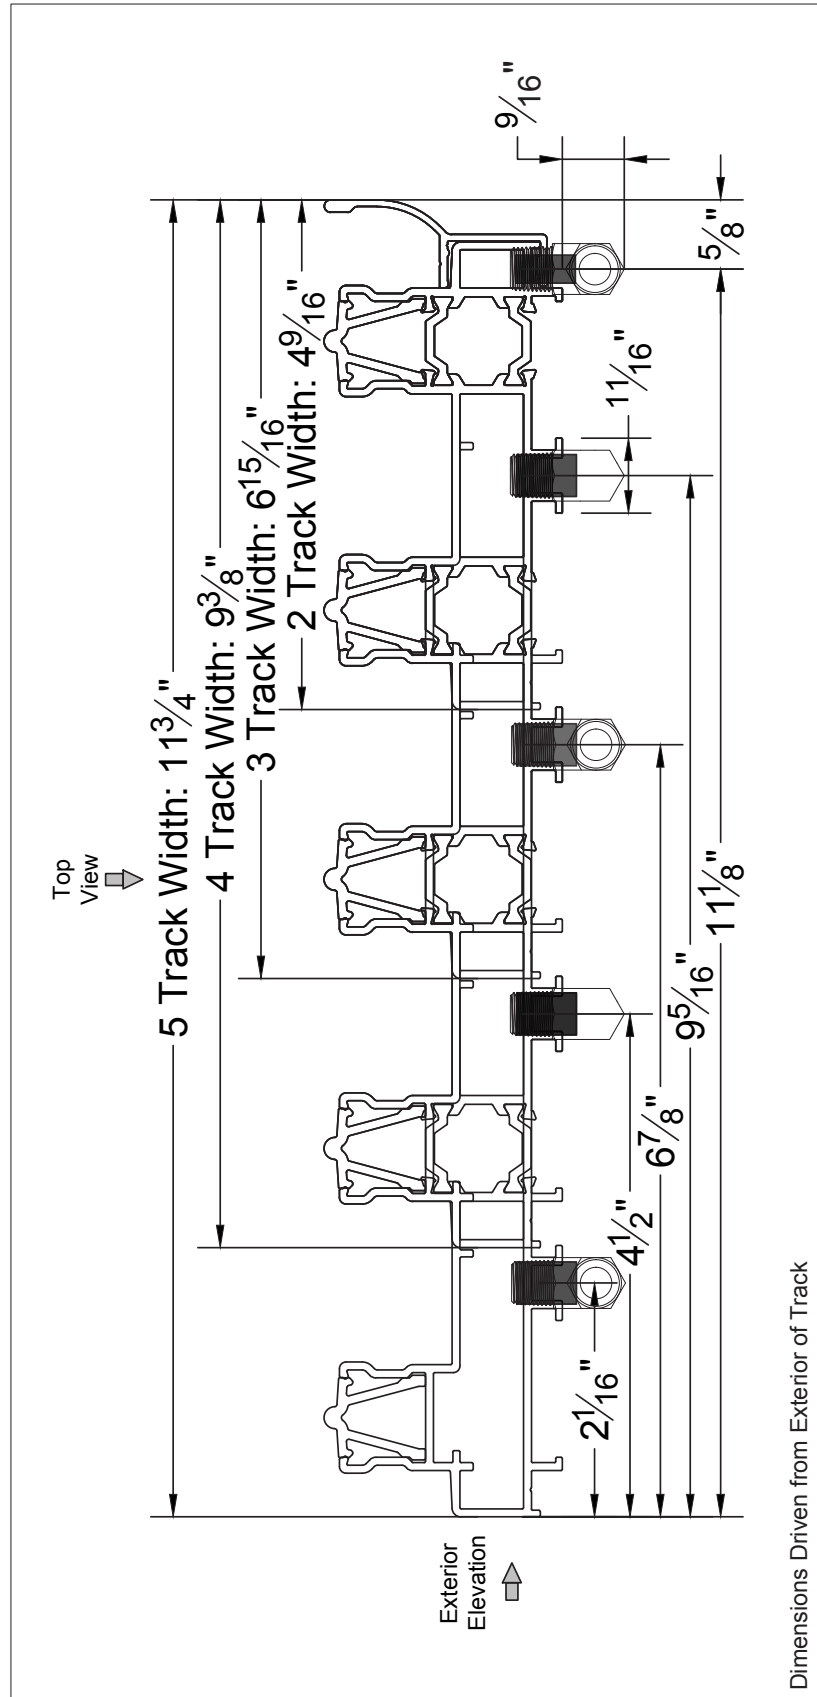

**Full Embed MS/L&S
Water Management System**


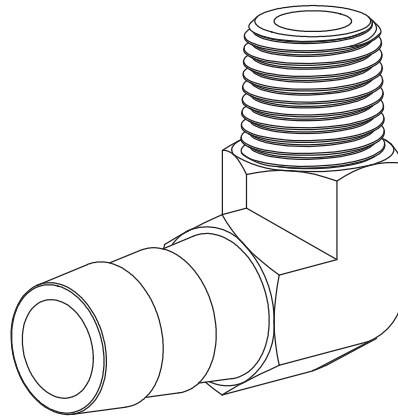


1/4 NPTF Pipe Size, 18 Threads Per Inch,
0.40" Thread Engagement

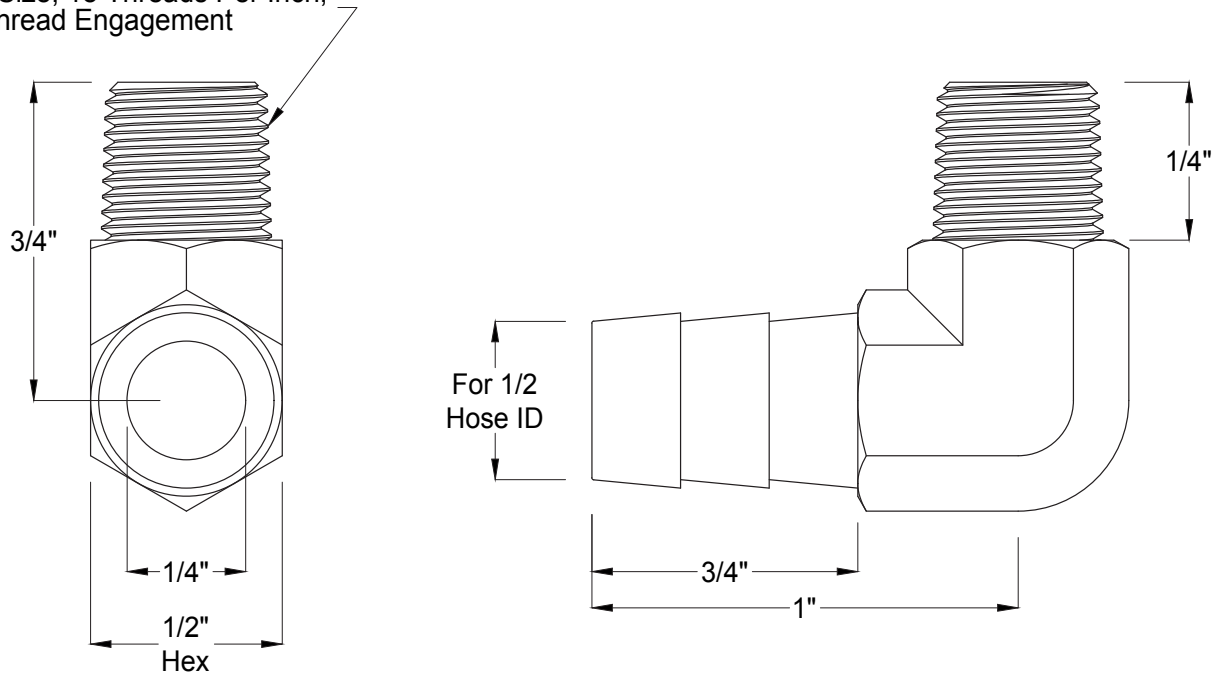

Full Embed MS/L&S
Water Management System

For fully embedded applications, trench /
dap-out to a minimum depth of 1" to allow for
drainage tube clearance.

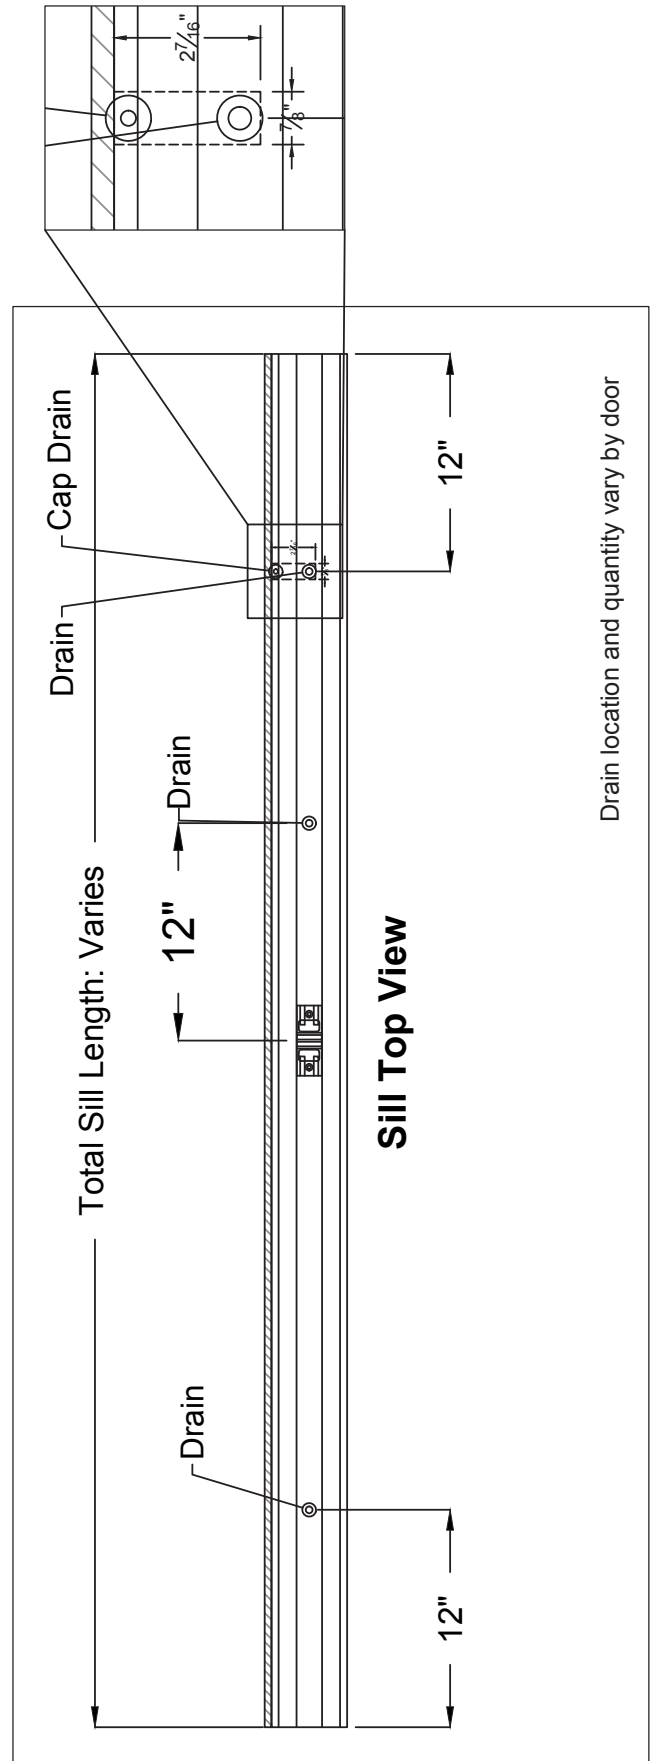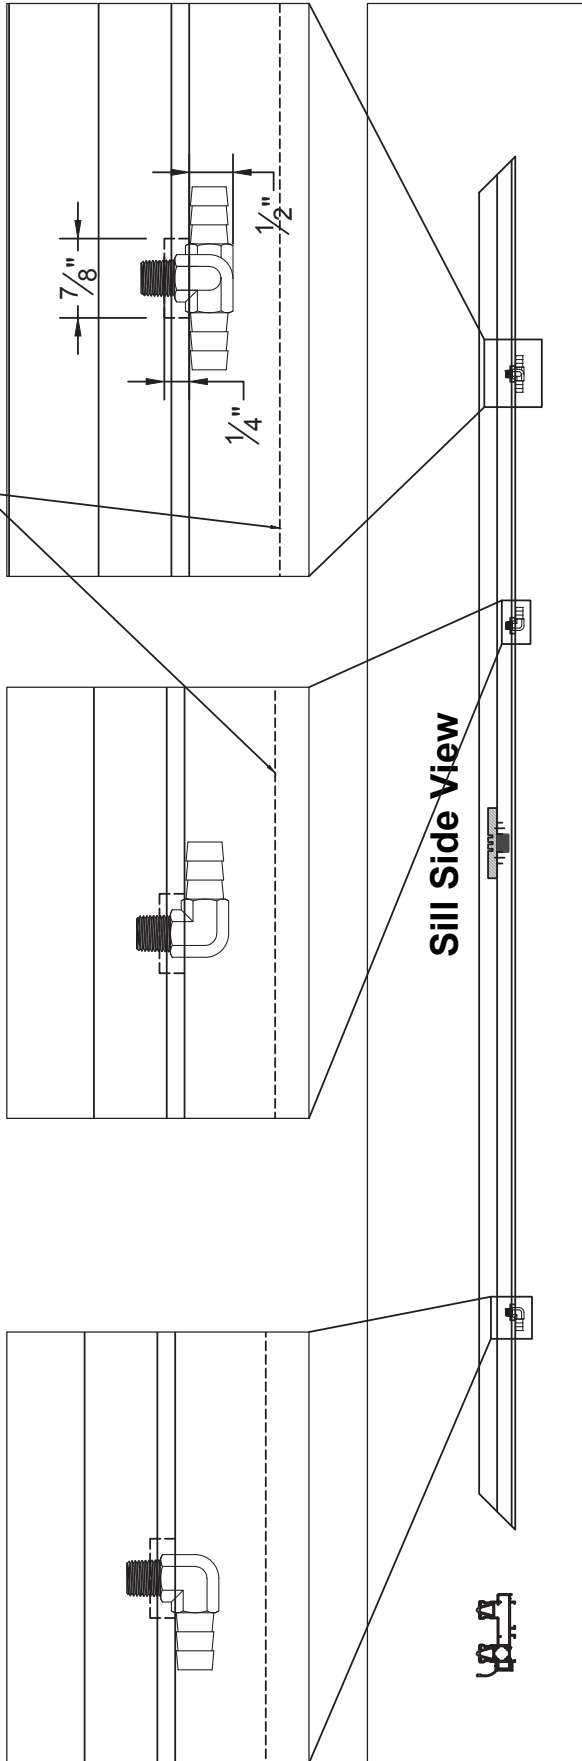







ANCHOR DETAILS


Anchor Installation Notes

1. One installation anchor is required at each anchor location shown unless specified in the anchor schedule. Two installation anchors at the jambs.
2. The number of installation anchors depicted is the minimum number of anchors to be used for product installation of the maximum size listed.
3. Install individual installation anchors within a tolerance of $\pm 1/2"$ the depicted location & spacing in the anchor layout details. (I.E., without consideration of tolerances). Tolerances are not cumulative from one installation anchor to the next.
4. Shim as required at each installation anchor with load bearing shim(s). Maximum allowable shim stack to be $1/4"$. Shim where space of $1/16"$ or greater occurs. Shim(s) shall be constructed of high density plastic or better.
5. For masonry or concrete openings, 1x wood buck may be used (optional as long as the minimum embedment and edge


- distance requirements are still met within the corresponding host substrate).
6. Minimum embedment and edge distance exclude wall finishes, including but not limited to stucco, foam, brick veneer and siding.
 7. Installation anchors and associated hardware must be made of corrosion resistant material or have a corrosion resistant coating.
 8. For hollow block and grout filled block, do not install installation anchors into mortar joints. Edge distance is measured from free edge of block or edge of mortar joint into face shell of block.
 9. Installation anchors shall be installed in accordance with anchor manufacturer's installation instructions, and anchors shall not be used in substrates with strengths less than the minimum strength specified by the anchor manufacturer.

ANCHOR SCHEDULE				
METHOD	SUBSTRATE	ANCHOR SCHEDULE	MIN EMBEDMENT	MIN EDGE DISTANCE
Through Frame	Wood: Min. SG = 0.55	#14 Wood Screw	1.5"	0.75"
	Metal: 18 Gauge Steel Min. Fy= 33KSI	#12 Self Drilling or Self Tapping Screw	3 Threads Min. Penetration Beyond Metal	0.50"
	Metal: 1/8" Min. Thickens Aluminum Min. 6063-T5			
	Concrete: f'c = 3000PSI	1/4" ITW Tapcon	1.25"	2.00"
	Masonry: CMU per ASTM C90	1/4" ITW Tapcon	1.25"	2.00"

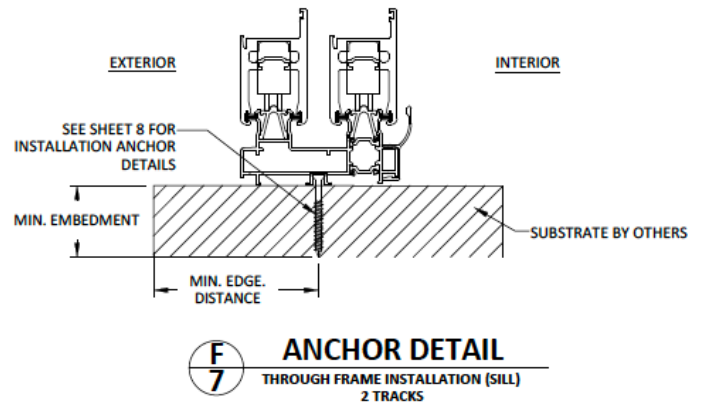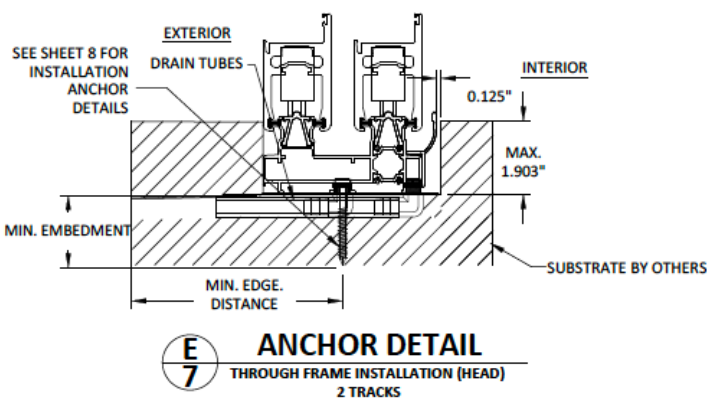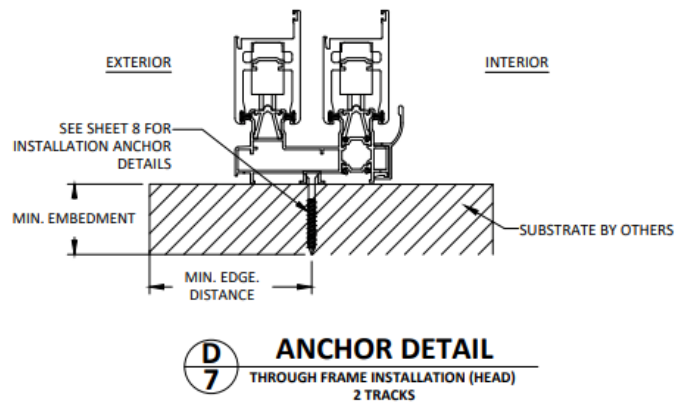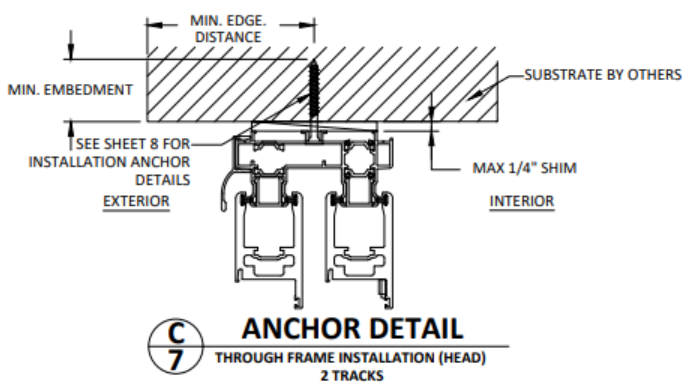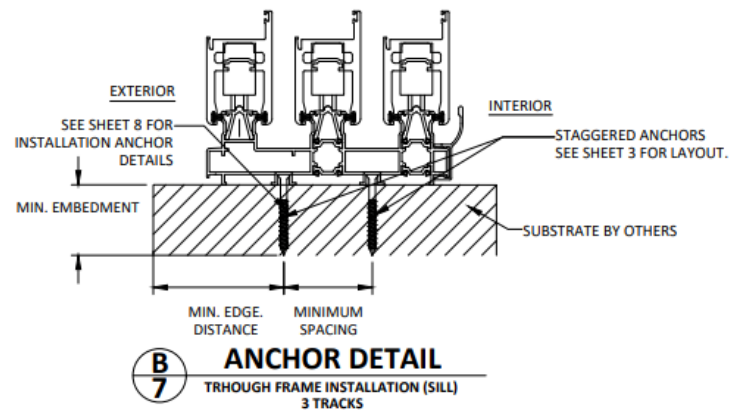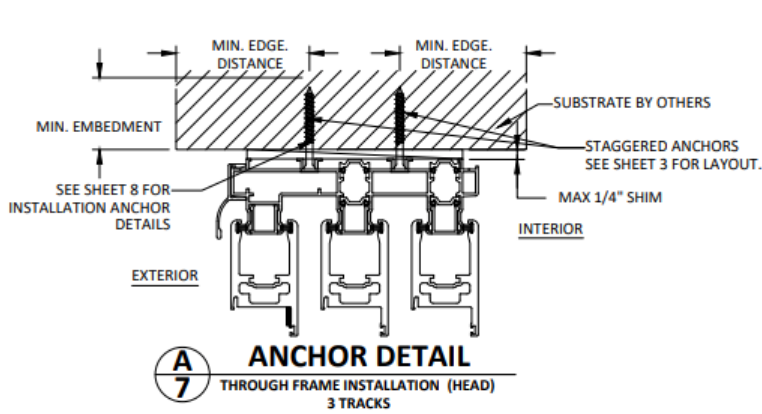

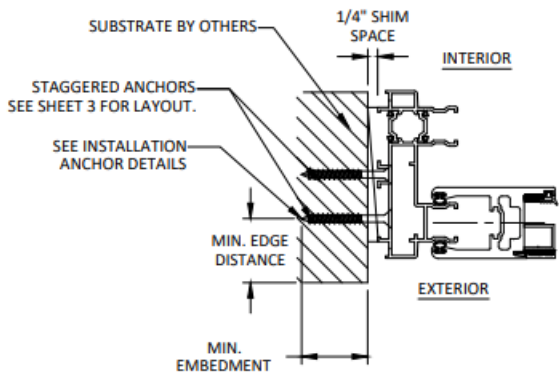


A
8
ANCHOR DETAIL
THROUGH FRAME (JAMB)
2 TRACK

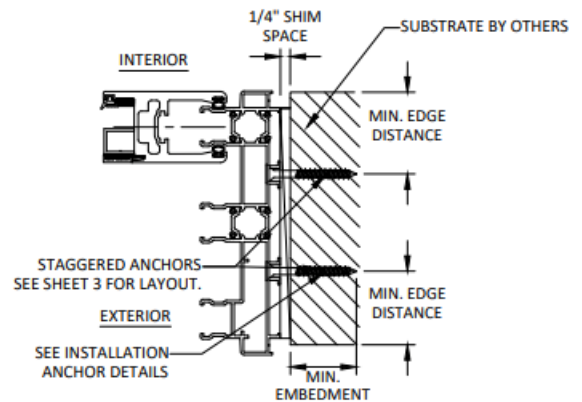

B
8
ANCHOR DETAIL
THROUGH FRAME (JAMB)
3 TRACK

ANCHOR FOR WALL BRACKET TO BE LOCATED AT A MAXIMUM OF 4" FROM THE CORNER AND MAXIMUM OF 12" O.C. SPACING

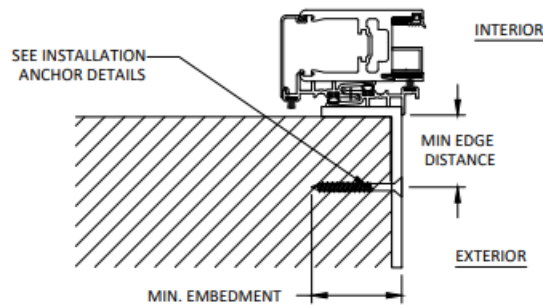


C
8
ANCHOR DETAIL
POCKET BRACKET INSTALLATION

XO Configuration

O = Fixed Panel
X = Active Panel





Hardware locations shown are standard. Locations may vary depending upon request or panel height.

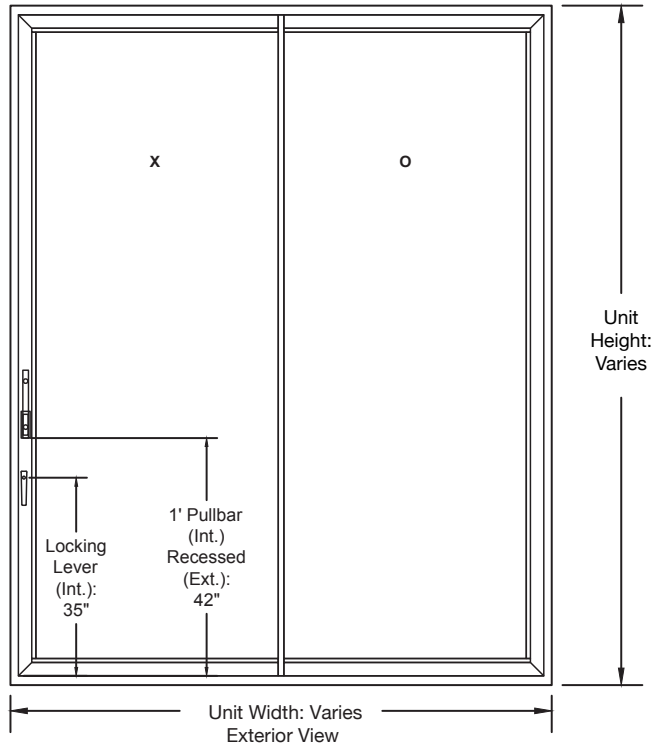

EXTERIOR ELEVATION




HORIZONTAL CROSS-SECTION

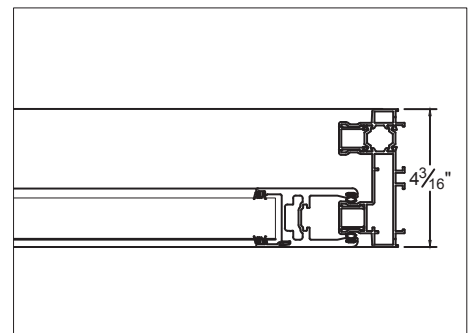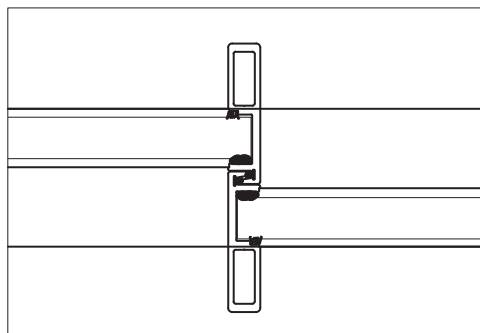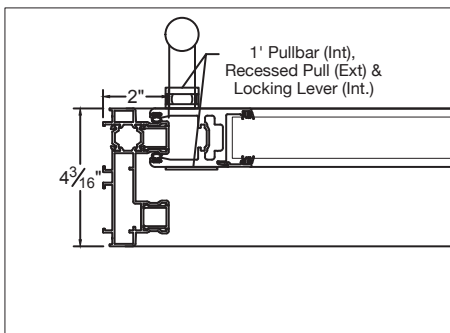


PXX-XO Configuration

O = Fixed Panel
X = Active Panel



Hardware locations shown are standard. Locations may vary depending upon request or panel height.

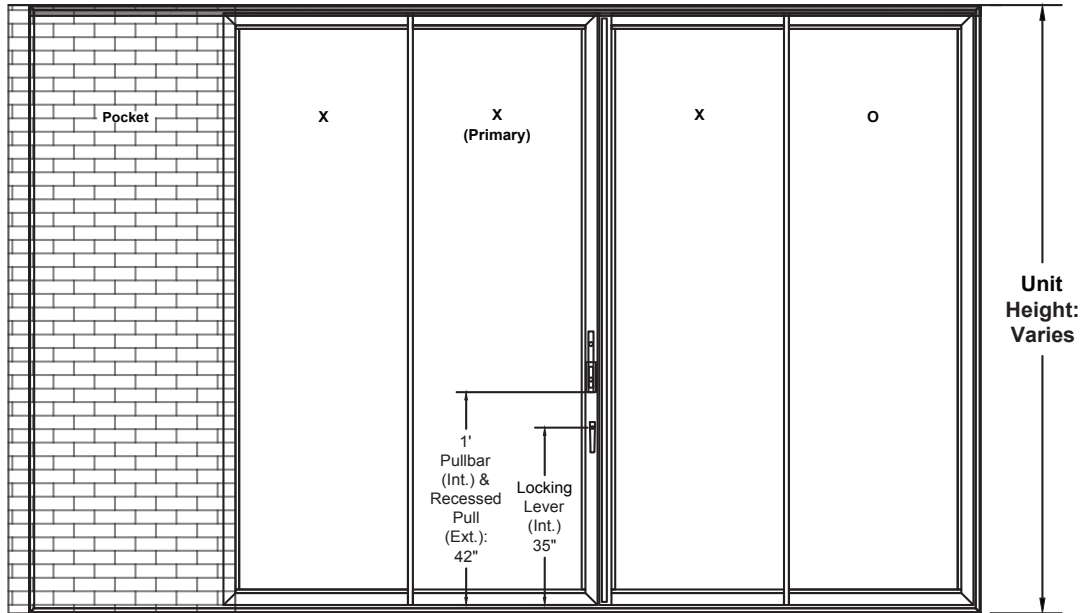

EXTERIOR ELEVATION

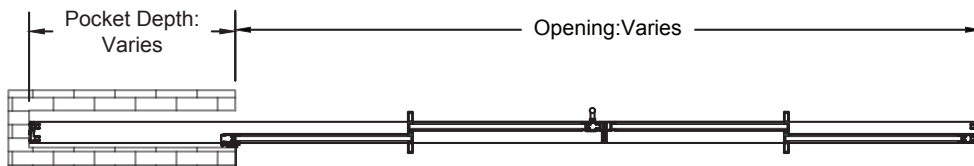

HORIZONTAL CROSS SECTION

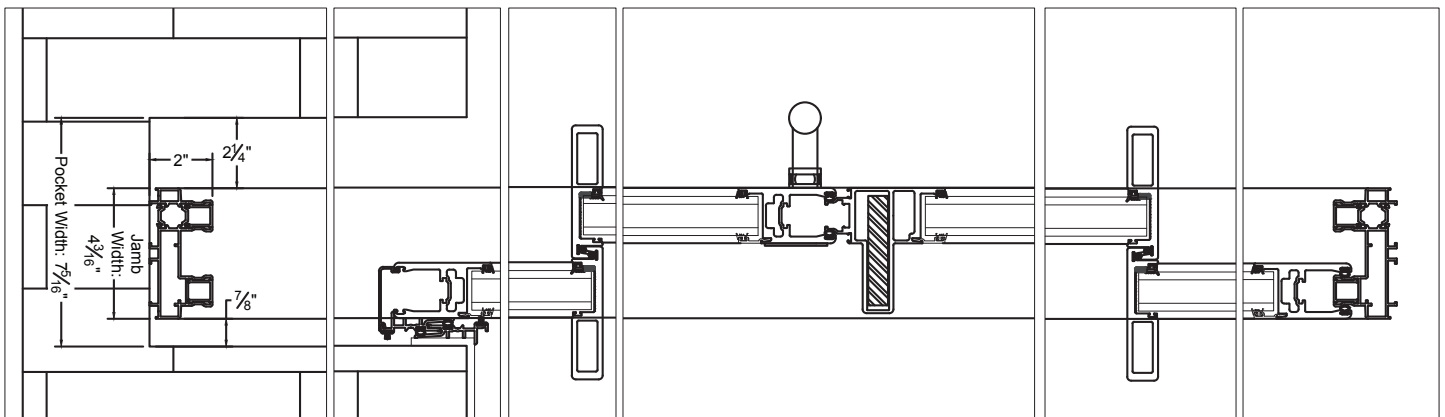

DESIGN PRESSURE CHART

WZ3
Panel Width (Inches)

Panel Height (Inches)	45	48	51	54	57	60	63	66	69	72	75	78	81	84	
	90	120	120	120	120	120	120	120	120	120	120	120	120	120	119
	96	120	120	120	120	120	120	120	120	120	120	120	108	107	106
	102	120	120	120	120	120	120	120	120	120	101	99	98	97	95
	108	120	120	120	120	120	120	120	120	95	93	91	89		
	114	120	120	120	120	120	120	120	89.6	87.3	85.3	83.5			
	120	120	120	120	120	120	120	85.9	83.4	81.2	79.2				
	126	120	120	117.6	112	107.1	83.1	80.4	78						
	132	113.7	107.3	101.7	96.8	81.2	78.2	75.6							
	138	99.1	93.5	88.5	79.9	76.7	73.9								
	144	87.6	83.1	79.2	75.8	72.7	70								
	150	79.8	75.2	71.1	67.6	64.4									
	156	70.7	66.6	63	59.8										
	162	63	59.3	56.1											
	168	56.4	53.1	50.2											

HVHZ
Panel Width (Inches)

Panel Height (Inches)	45	48	51	54	57	60	63	66	69	72	75	78	81	84	
	92	120	120	120	120	120	120	120	120	120	120	120	120	115	114
	96	120	120	120	120	120	120	120	120	120	120	120	108	107	106
	100	120	120	120	120	120	120	120	120	120	120	103	101	100	99
	104	120	120	120	120	120	120	120	120	120	98	96	95	94	
	108	120	120	120	120	120	120	120	120	94.4	92.4	90.6	89		
	112	120	120	120	120	120	120	120	91.8	89.5	87.5	85.7			
	116	120	120	120	120	120	120	89.9	87.4	85.1	83.1				
	120	120	120	120	120	120	120	85.9	83.4	81.2	79.2				
	124	120	120	120	117.8	112.6	84.9	82.2	79.7	77.5					
	128	120	118.1	112	106.6	84.4	81.4	78.8	76.4						
	132	113.7	107.3	101.7	96.8	81.2	78.2	75.6							
	136	103.7	97.8	92.7	81.3	78.1	75.3	72.7							
	140	94.8	89.4	84.7	78.5	75.3	72.5								
	144	87.6	83.1	79.2	75.8	72.7	70								

TEST PERFORMANCE RESULTS

- Approved for use in Miami-Dade HVHZ Zone
- Florida Building Code Approved
Product Approval FL 27423
- AAMA 440 - PASS
- ASTM E1300 - PASS
- NAFS - 08 - PASS
- WDMA/CSA101 - PASS
- Up to 120 DP
- Tested for use in Florida
- Impact 1886 & 1996
- TAS 201, 202, 203 (Miami Dade)

NFRC

Descrip.	Product Number	Pane IDs	Pane Thickness	Gap / Fill	Surface / Emissivity	Tint	Grid Type / Size	U-factor	SHGC	VT	CR
6mm 366 - .500 Arg - 5mm/090SGP/6mm Clr	001	#1: 2157 #2: 48927	#1: 0.225 #2: 0.5	0.5 ARG90	#2: 0.022	CL	N,G 0.75	0.52	N: 0.22 G: 0.20	N: 0.46 G: 0.40	33
6mm 366 - .500 Arg - 5mmGray/090SGP/6mmClr		#1: 2157 #2: 50212	#1: 0.225 #2: 0.499	0.5 ARG90	#2: 0.022	GY	N,G 0.75	0.52	N: 0.21 G: 0.19	N: 0.26 G: 0.22	33
6mm 366 - .500 Arg - 6mmGray/090SGP/5mmClr		#1: 2157 #2: 50215	#1: 0.225 #2: 0.497	0.5 ARG90	#2: 0.022	GY	N,G 0.75	0.52	N: 0.21 G: 0.19	N: 0.23 G: 0.20	33
6mm 366 - .500 Arg - 5mm/090SGP/6mm i89	002	#1: 2157 #2: 48928	#1: 0.225 #2: 0.498	0.5 ARG90	#2: 0.022 #4: 0.149	CL	N,G 0.75	0.48	N: 0.21 G: 0.19	N: 0.45 G: 0.39	32
6mm 366 - .500 Arg - 5mmGray/090SGP/6mm i89		#1: 2157 #2: 50213	#1: 0.225 #2: 0.497	0.5 ARG90	#2: 0.022 #4: 0.149	GY	N,G 0.75	0.48	N: 0.20 G: 0.18	N: 0.25 G: 0.22	32
6mm 366 - .500 Arg - 6mmGray/090SGP/5mm i89		#1: 2157 #2: 50214	#1: 0.225 #2: 0.5	0.5 ARG90	#2: 0.022 #4: 0.149	GY	N,G 0.75	0.48	N: 0.19 G: 0.18	N: 0.22 G: 0.20	32
6mm SB70 - .500 Arg - 5mm/090SGP/6mm Clr	003	#1: 5439 #2: 48927	#1: 0.223 #2: 0.5	0.5 ARG90	#2: 0.018	CL	N,G 0.75	0.52	N: 0.22 G: 0.20	N: 0.47 G: 0.41	33
6mm SB70 on Gray - .500 Arg - 5mmClr/090SGP/6mmClr		#1: 5373 #2: 48927	#1: 0.223 #2: 0.5	0.5 ARG90	#2: 0.018	GY	N,G 0.75	0.52	N: 0.15 G: 0.14	N: 0.25 G: 0.21	33
6mm SB70 - .500 Arg - 5mmGray/090SGP/6mmClr		#1: 5439 #2: 50212	#1: 0.223 #2: 0.499	0.5 ARG90	#2: 0.018	GY	N,G 0.75	0.52	N: 0.21 G: 0.19	N: 0.26 G: 0.23	33
6mm SB70 - .500 Arg - 6mmGray/090SGP/5mmClr		#1: 5439 #2: 50215	#1: 0.223 #2: 0.497	0.5 ARG90	#2: 0.018	GY	N,G 0.75	0.52	N: 0.21 G: 0.19	N: 0.23 G: 0.20	33
6mm 340 - .500 Arg - 5mm/090SGP/6mm Clr	004	#1: 2167 #2: 48927	#1: 0.224 #2: 0.5	0.5 ARG90	#2: 0.028	GY	N,G 0.75	0.53	N: 0.15 G: 0.14	N: 0.28 G: 0.24	33
6mm 340 - .500 Arg - 5mm/090SGP/6mm i89	005	#1: 2167 #2: 48928	#1: 0.224 #2: 0.498	0.5 ARG90	#2: 0.028 #4: 0.149	GY	N,G 0.75	0.48	N: 0.14 G: 0.13	N: 0.27 G: 0.23	32
6mm 366 - .500 Air - 5mm/090SGP/6mm Clr	006	#1: 2157 #2: 48927	#1: 0.225 #2: 0.5	0.5 AIR	#2: 0.022	CL	N,G 0.75	0.55	N: 0.22 G: 0.20	N: 0.46 G: 0.40	33
6mm 366 - .500 Air - 5mmGray/090SGP/6mmClr		#1: 2157 #2: 50212	#1: 0.225 #2: 0.499	0.5 AIR	#2: 0.022	GY	N,G 0.75	0.55	N: 0.21 G: 0.19	N: 0.26 G: 0.22	33
6mm 366 - .500 Air - 6mmGray/090SGP/5mmClr		#1: 2157 #2: 50215	#1: 0.225 #2: 0.497	0.5 AIR	#2: 0.022	GY	N,G 0.75	0.55	N: 0.21 G: 0.19	N: 0.23 G: 0.20	33
6mm 366 - .500 Air - 5mm/090SGP/6mm i89	007	#1: 2157 #2: 48928	#1: 0.225 #2: 0.498	0.5 AIR	#2: 0.022 #4: 0.149	CL	N,G 0.75	0.51	N: 0.21 G: 0.19	N: 0.45 G: 0.39	32
6mm 366 - .500 Air - 5mmGray/090SGP/6mm i89		#1: 2157 #2: 50213	#1: 0.225 #2: 0.497	0.5 AIR	#2: 0.022 #4: 0.149	GY	N,G 0.75	0.51	N: 0.20 G: 0.18	N: 0.25 G: 0.22	32
6mm 366 - .500 Air - 6mmGray/090SGP/5mm i89		#1: 2157 #2: 50214	#1: 0.225 #2: 0.5	0.5 AIR	#2: 0.022 #4: 0.149	GY	N,G 0.75	0.51	N: 0.19 G: 0.17	N: 0.22 G: 0.20	32

Descrip.	Product Number	Pane IDs	Pane Thickness	Gap / Fill	Surface / Emissivity	Tint	Grid Type / Size	U-factor	SHGC	VT	CR
6mm SB70 - .500 Air - 5mm/090SGP/6mm Clr	008	#1: 5439 #2: 48927	#1: 0.223 #2: 0.5	0.5 AIR	#2: 0.018	CL	N,G 0.75	0.55	N: 0.22 G: 0.20	N: 0.47 G: 0.41	33
6mm SB70 - .500 Air - 5mmGray/090SGP/6mmClr		#1: 5439 #2: 50212	#1: 0.223 #2: 0.499	0.5 AIR	#2: 0.018	GY	N,G 0.75	0.55	N: 0.21 G: 0.19	N: 0.26 G: 0.23	33
6mm SB70 on Gray - .500 Air - 5mmClr/090SGP/6mmClr		#1: 5373 #2: 48927	#1: 0.223 #2: 0.5	0.5 AIR	#2: 0.018	GY	N,G 0.75	0.55	N: 0.16 G: 0.15	N: 0.25 G: 0.21	33
6mm SB70 - .500 Air - 6mmGray/090SGP/5mmClr		#1: 5439 #2: 50215	#1: 0.223 #2: 0.497	0.5 AIR	#2: 0.018	GY	N,G 0.75	0.55	N: 0.21 G: 0.19	N: 0.23 G: 0.20	33
6mm 340 - .500 Air - 5mm/090SGP/6mm Clr	009	#1: 2167 #2: 48927	#1: 0.224 #2: 0.5	0.5 AIR	#2: 0.028	GY	N,G 0.75	0.56	N: 0.16 G: 0.14	N: 0.28 G: 0.24	33
6mm 340 - .500 Air - 5mm/090SGP/6mm i89	010	#1: 2167 #2: 48928	#1: 0.224 #2: 0.498	0.5 AIR	#2: 0.028 #4: 0.149	GY	N,G 0.75	0.51	N: 0.15 G: 0.13	N: 0.27 G: 0.23	32
6mm 270 - .500 Arg - 5mm/090SGP/6mm Clr	011	#1: 2029 #2: 48927	#1: 0.236 #2: 0.5	0.5 ARG90	#2: 0.037	CL	N,G 0.75	0.53	N: 0.28 G: 0.25	N: 0.49 G: 0.43	33
6mm 270 - .500 Arg - 6mmGray/090SGP/5mmClr		#1: 2029 #2: 50215	#1: 0.236 #2: 0.497	0.5 ARG90	#2: 0.037	GY	N,G 0.75	0.53	N: 0.27 G: 0.24	N: 0.25 G: 0.22	33
6mm 270 - .500 Arg - 5mmGray/090SGP/6mmClr		#1: 2029 #2: 50212	#1: 0.236 #2: 0.499	0.5 ARG90	#2: 0.037	GY	N,G 0.75	0.53	N: 0.27 G: 0.24	N: 0.28 G: 0.24	33
6mm SB60 - .500 Arg - 5mm/090SGP/6mm Clr	012	#1: 5284 #2: 48927	#1: 0.223 #2: 0.5	0.5 ARG90	#2: 0.035	CL	N,G 0.75	0.53	N: 0.30 G: 0.27	N: 0.52 G: 0.45	33
6mm SB60 on Gray - .500 Arg - 5mmClr/090SGP/6mmClr		#1: 5289 #2: 48927	#1: 0.223 #2: 0.5	0.5 ARG90	#2: 0.035	GY	N,G 0.75	0.53	N: 0.19 G: 0.17	N: 0.26 G: 0.23	33
6mm SB60 - .500 Arg - 5mmGray/090SGP/6mmClr		#1: 5284 #2: 50212	#1: 0.223 #2: 0.499	0.5 ARG90	#2: 0.035	GY	N,G 0.75	0.53	N: 0.29 G: 0.26	N: 0.29 G: 0.25	33
6mm SB60 - .500 Arg - 6mmGray/090SGP/5mmClr		#1: 5284 #2: 50215	#1: 0.223 #2: 0.497	0.5 ARG90	#2: 0.035	GY	N,G 0.75	0.53	N: 0.29 G: 0.26	N: 0.26 G: 0.22	33
6mm 270 - .500 Air - 5mm/090SGP/6mm Clr	013	#1: 2029 #2: 48927	#1: 0.236 #2: 0.5	0.5 AIR	#2: 0.037	CL	N,G 0.75	0.56	N: 0.28 G: 0.25	N: 0.49 G: 0.43	33
6mm 270 - .500 Air - 6mmGray/090SGP/5mmClr		#1: 2029 #2: 50215	#1: 0.236 #2: 0.497	0.5 AIR	#2: 0.037	GY	N,G 0.75	0.56	N: 0.27 G: 0.24	N: 0.25 G: 0.22	33
6mm 270 - .500 Air - 5mmGray/090SGP/6mmClr		#1: 2029 #2: 50212	#1: 0.236 #2: 0.499	0.5 AIR	#2: 0.037	GY	N,G 0.75	0.56	N: 0.27 G: 0.24	N: 0.28 G: 0.24	33
6mm SB60 - .500 Air - 5mm/090SGP/6mm Clr	014	#1: 5284 #2: 48927	#1: 0.223 #2: 0.5	0.5 AIR	#2: 0.035	CL	N,G 0.75	0.56	N: 0.31 G: 0.27	N: 0.52 G: 0.45	33
6mm SB60 - .500 Air - 5mmGray/090SGP/6mmClr		#1: 5284 #2: 50212	#1: 0.223 #2: 0.499	0.5 AIR	#2: 0.035	GY	N,G 0.75	0.56	N: 0.29 G: 0.26	N: 0.29 G: 0.25	33
6mm SB60 - .500 Air - 6mmGray/090SGP/5mmClr		#1: 5284 #2: 50215	#1: 0.223 #2: 0.497	0.5 AIR	#2: 0.035	GY	N,G 0.75	0.56	N: 0.29 G: 0.26	N: 0.26 G: 0.22	33
6mm SB60 on Gray - .500 Air - 5mmClr/090SGP/6mmClr		#1: 5289 #2: 48927	#1: 0.223 #2: 0.5	0.5 AIR	#2: 0.035	GY	N,G 0.75	0.56	N: 0.20 G: 0.18	N: 0.26 G: 0.23	33
6mm 270 - .500 Arg - 5mm/090SGP/6mm i89	015	#1: 2029 #2: 48928	#1: 0.236 #2: 0.498	0.5 ARG90	#2: 0.037 #4: 0.149	CL	N,G 0.75	0.49	N: 0.27 G: 0.24	N: 0.48 G: 0.42	32

Descrip.	Product Number	Pane IDs	Pane Thickness	Gap / Fill	Surface / Emissivity	Tint	Grid Type / Size	U-factor	SHGC	VT	CR
6mm 270 - .500 Arg - 6mmGray/090SGP/5mm i89		#1: 2029 #2: 50214	#1: 0.236 #2: 0.5	0.5 ARG90	#2: 0.037 #4: 0.149	GY	N,G 0.75	0.49	N: 0.25 G: 0.22	N: 0.24 G: 0.21	32
6mm 270 - .500 Arg - 5mmGray/090SGP/6mm i89		#1: 2029 #2: 50213	#1: 0.236 #2: 0.497	0.5 ARG90	#2: 0.037 #4: 0.149	GY	N,G 0.75	0.49	N: 0.25 G: 0.23	N: 0.27 G: 0.24	32
6mm 270 - .500 Air - 5mm/090SGP/6mm i89	016	#1: 2029 #2: 48928	#1: 0.236 #2: 0.498	0.5 AIR	#2: 0.037 #4: 0.149	CL	N,G 0.75	0.51	N: 0.27 G: 0.24	N: 0.48 G: 0.42	32
6mm 270 - .500 Air - 6mmGray/090SGP/5mm i89		#1: 2029 #2: 50214	#1: 0.236 #2: 0.5	0.5 AIR	#2: 0.037 #4: 0.149	GY	N,G 0.75	0.51	N: 0.24 G: 0.22	N: 0.24 G: 0.21	32
6mm 270 - .500 Air - 5mmGray/090SGP/6mm i89		#1: 2029 #2: 50213	#1: 0.236 #2: 0.497	0.5 AIR	#2: 0.037 #4: 0.149	GY	N,G 0.75	0.51	N: 0.25 G: 0.22	N: 0.27 G: 0.24	32

22.0 Laminates Constructed in Optics:

Pane ID	Outboard Descrip.	Outboard IGDB	Interlayer Descrip. & Optics File	Inboard Descrip.	Inboard IGDB
48927	5mm Clr	5011	0.090 SGP: 90SGP6-DUP	6mm Clr	5012
48927	5mm Clr	5011	0.090 SGP: 90SGP6-DUP	i89 on 6mm Clr	2162
50212	5mm Gray	5051	0.090 SGP: 90SGP6-DUP	6mm Clr	5012
50213	5mm Gray	5051	0.090 SGP: 90SGP6-DUP	i89 on 6mm Clr	2162
50214	6mm Gray	5052	0.090 SGP: 90SGP6-DUP	i89 on 5mm Clr	2161
50215	6mm Gray	5052	0.090 SGP: 90SGP6-DUP	5mm Clr	5011



EURO-WALL 10 YEAR WARRANTY

Euro-Wall warrants the products to be free from manufacturing defects for a period of 10 years from the date of purchase.

888.989.EURO (3876)

www.euro-wall.com

MANUFACTURING

2200 Murphy Court
North Port, Florida 34289
888.989.3876 • 941.979.5316

euro-wall[®]

FOLDING | SLIDING | STACKING | PIVOT

SHOWROOM

1211 Stirling Road, Unit 102,
Dania Beach, Florida 33004
954.610.2572

Proud Member of the American Architectural Manufacturers Association.

