

# GLASS SLIM FACTORY



MODERN LOW PROFILE WALL SYSTEM WITH HIGH ADJUSTABILITY AND SIMPLIFIED INSTALLATION



## PRODUCT FEATURES



Enhanced light penetration  
Minimal extrusions  
Surface or recessed mounted  
10mm-25mm, 0.39"-0.98" installation tolerance

Single glazing  
Integrated floor to ceiling pivot doors available as frameless, acoustic framed, or solid wood

## STANDARDS

<b>Wall thickness:</b>	39mm (1 1/2")
<b>Minimum panel width:</b>	200mm (8")
<b>Maximum panel width:</b>	1200mm (4')
<b>Maximum panel height:</b>	3000mm (10')
<b>Top profile height:</b>	50mm (2")
<b>Bottom profile height:</b>	50mm (2")
<b>Sound Rating:</b>	33-40

## GLASS THICKNESS

10, 12, or 16mm (3/8", 1/2", or 5/8")


## STANDARD JOINT

High transparency acoustic I shaped PVC profile

## STANDARD WARRANTY

5 years

## DOORS

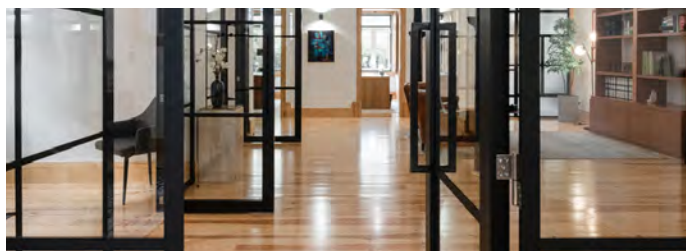

<b>Opaque Door:</b>	50mm (2")
<b>Glass Door:</b>	10mm (3/8")
<b>Framed Single Glazed Door:</b>	50mm (2")
<b>WOD Glass Slim:</b>	50mm (2")
<b>50mm Double Glazed Door:</b>	50mm (2")